



www.ashokacoatingchemicals.com



ASHOKA
Coating Chemicals

ISO 9001 : 2015 / 14001:2015 & ISO 10002: 2018
CERTIFIED COMPANY

EPOXY TILE GROUT

**STAIN FREE EPOXY TILE GROUT
FOR FLOOR & WALL**

**PACKING AVAILABLE :
1.2 & 6 Kgs**



ADVANTAGES :

- ❖ Cleanable With Water
- ❖ Easy To Install & Clean
- ❖ Hard & Durable Joints
- ❖ Low Odor Formulation
- ❖ High Strength & Versatile
- ❖ Non Cracking & Powering
- ❖ Stain & Bacterial Resistant
- ❖ Waterproof & Durable Finish
- ❖ Chemical & Temperature Resistant
- ❖ Attractive Appearance, Easily Cleaned
- ❖ Available In Range Of Attractive Colours
- ❖ Excellent Resistance To Industrial Chemicals
- ❖ Solvent Free- Can Be Used In Confined Areas

DESCRIPTION :

It is a thixotropic, 3 packs water dispersible Epoxy based tile grout ideal for all type of tile joints. Also an eco friendly & Provides excellent adhesion even under damp condition. It is available in range of colours, easy to mix and apply. Tile gap width of 3 mm to 12mm gap can be filled easily with APRICOT VASTULAPE EPOXY TILE GROUT. Excellent resistance to acids & chemicals.

Provides a stain free, chemical resistant, hardwearing, tile Joints for areas such as bathrooms, fountains and swimming pools, factories, workshops and warehouses, pharma industries hospitals and labs.

APPLICATION:

VASTULAPE EPOXY TILE GROUT is designed for grouting ceramic tiles, glazed tiles, mosaic tiles, vitrified and fully vitrified tiles, industrial tiles, granite tiles, acid resistant tiles. Factories, Bathrooms, Workshops, Warehouses, Fountains, Commercial areas, Swimming pools, Industries etc.,

HOW TO USE :

Step 1: Mix all the three parts together in a clean container thoroughly till a uniformity of the paste is achieved.

Step 2: Pour the paste into the tile joints and clean. In wet areas like bathrooms, Swimming pools etc.

COVERAGE : Consumption depends on joint width and size of tiles

APRICOT TILE ADHESIVE S-95

DESCRIPTION / ADVANTAGES :

APRICOT TILE ADHESIVE S-95 is a white cement-based high strength, fast set, marble adhesive for the fixing of marble and granite stones on the floors and walls. It can be used for Interior and exterior application. It does not discolour marble. Suitable for wall and floor.

APPLICATION :

Can be used per fixing Marbles / Granite on Concrete screeds surfaces.

CONSUMPTION / COVERAGE :

Under normal conditions of coverage approx. 7 Sq. mt per 20 Kg bag at 3mm thickness.

HOW TO USE :

Spread adhesive using a notched trowel to a minimum bedded thickness of 3 mm to 6 mm on floors. Press marble firmly into wet adhesive with a twisting action. Use a rubber mallet to bed marble. Clean excess adhesive off the surface once marble are firmly set using a damp sponge. Once the adhesive has hardened, only mechanical removal is possible. Adhesive must be allowed to dry for 6 hours for final setting time Mix the required quantity only, enough to be used within 60-minute pot life

PACK SIZE : 20 Kg



APRICOT TILE ADHESIVE S-65

DESCRIPTION / ADVANTAGES :

It is an universal adhesive and filling mortar for tile fixing. It is cement based polymer modified adhesive for fixing tiles. Suitable for bonding of different construction materials in exterior and interior areas and also a water and frost proof material.

APPLICATION :


To fix tile on tiles, marbles, mosaic and concrete floor etc.

CONSUMPTION / COVERAGE : 3 kg per sq mt at 3 mm thickness

HOW TO USE :

Mix 3 parts of tile adhesive with one part by volume of water to a stiff consistency and leave for 10 minutes. Remix and use

PACK SIZE : 20 Kg

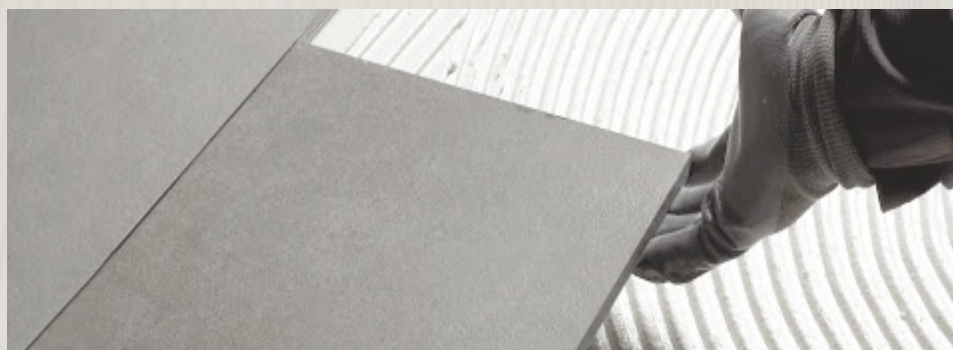

APRICOT TILE GROUT

DESCRIPTION : APRICOT UNSANDED TILE GROUT is a non-shrink , non-toxic, thin-set mortar, used for floors and walls in interior or exterior installations, to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. When added to water it readily blends to produce a smooth creamy paste. When set, it is water and mould resistant. It is used for grouting of tiles, stones, marble joints and edges. It has good water repellency properties, excellent adhesion (high bonding strength) and seals joint permanently.

APPLICATIONS : Can be used for Interior/exterior floors, walls and countertops
Grouting of ceramic tiles, marbles, natural stones. External and internal areas.
Residential and commercial areas etc.

HOW TO USE :

Mix 3parts of tile mate with one part by volume of water to a stiff consistency and leave for 10 minutes. Remix and use

ADVANTAGES : Easy to use, Aesthetic, available in all tile colors, Withstands temperature, Durable, UV resistant, Water resistant, High strength & Low cost

COVERAGE : 120 sft at 3 mm width for 12x 12 tile

PACK SIZE : 1 kg



APRICOT TILE GROUT

DESCRIPTION : APRICOT UNSANDED TILE GROUT is a non-shrink , non-toxic, thin-set mortar, used for floors and walls in interior or exterior installations, to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. When added to water it readily blends to produce a smooth creamy paste. When set, it is water and mould resistant. It is used for grouting of tiles, stones, marble joints and edges. It has good water repellency properties, excellent adhesion (high bonding strength) and seals joint permanently.

APPLICATIONS : Can be used for Interior/exterior floors, walls and countertops
Grouting of ceramic tiles, marbles, natural stones. External and internal areas.
Residential and commercial areas etc.

HOW TO USE :

Mix 3parts of tile mate with one part by volume of water to a stiff consistency and leave for 10 minutes. Remix and use

ADVANTAGES : Easy to use, Aesthetic, available in all tile colors, Withstands temperature, Durable, UV resistant, Water resistant, High strength & Low cost

COVERAGE : 120 sft at 3 mm width for 12x 12 tile

PACK SIZE : 1 kg



APRICOT WATER PROOF IWPL

DESCRIPTION / ADVANTAGES :

It is a liquid integral waterproofing compound based on modified plasticisers. Being a liquid it disperses instantly with gauging water. Improves strength through reduction of water content. Improves workability cohesiveness of mortar & minimises shrinkage cracks. Does not affect the setting time. Chloride free, hence no effect on concrete.

APPLICATION : Roof slabs, retaining wall & Cement mortar, Basement raft, sunken slabs, water tanks, Bathrooms & wash areas etc.

CONSUMPTION : 200 ml per 50kg cement

HOW TO USE: To be mixed with dosing water.

PACK SIZE: 1ltr, 5ltr, 20ltr and 240 ltr.



APRICOT BLOCK MORTAR

DESCRIPTION / ADVANTAGES :

Specially designed to provide stronger, much more durable bonding between the blocks with superior adhesive strength. It replaces conventional (cement and sand mix) mortar. It is self curing and no additional water curing is required.

CONSUMPTION / COVERAGE :

Under normal conditions of coverage approx. 12 sq.mt with an average thickness of 3mm per bag of 40 Kgs. (Block size 600x200x150mm)

APPLICATION :

Fly ash bricks, cement blocks, hollow blocks, AAC blocks, pre stressed concrete slabs, panels/parapet walls/jointing of cement windows and door frames/ garden boundary walls

HOW TO USE:

The surface of masonry units should be slightly wet prior to application of Block Adhesive. Apply a thin uniform layer of Apricot Block Mortar, 3- 4mm thick, on the clean & leveled surface of masonry units using proper trowel. After placing the first units apply Apricot Block Mortar of same thickness on both sides of the unit, keeping continuous checks for the line and level

PACK SIZE: 40 Kg





ACRYLIC WALL TEXTURE

DESCRIPTION :

Apricot Vastu Lape Acrylic wall Texture , is made from high quality Acrylic emulsion which retains the elegance and Premium look for years. Vastu Lape Texture Fire Resistance / Water Repellent Warranty for 10 years approx. (Depend on surface)

APPLICATION :

Exterior, Interior, Plasters, Concrete and more

COVERAGE :

120 sq. ft. approx. for 25 Kgs. (Depend on surface)

FINISH : Rich Matt Finish

PACKING AVAILABLE : 25 Kgs (Bag)

PRICE : Rs. 485/-

ACRYLIC WALL PUTTY

DESCRIPTION :

Apricot Vastu Lape Acrylic wall putty, is made from acrylic co-polymer emulsion specially made for filling dents, leveling surfaces prior to painting. Vastu Lape acrylic wall putty is water Based putty which provides rich, smooth finish when applied on masonry walls.

APPLICATION :

Interior, Concrete walls, plasters etc.,

COVERAGE :

9 -10 sq. Ft. per Kg per coat (Depend on surface)

FINISH : Smooth finish

PACKING AVAILABLE : 20Kgs (Bag)

PRICE : Rs. 315/-



BRILLIANT WHITE APRICOT WALL PUTTY

DESCRIPTION

Apricot Wall Putty is white cement based powder finished Coating applied on walls, surfaces and ceilings. This covers unevenness undulations and pin holes on the plastered surface. It strengthens the wall and protects expensive paints from dampness, efflorescence and moisture. Apricot Wall Putty is modified with polymers and special additives for enhanced strength, finish and performance. ACC delivers the real essence of ultra-fine decor - always.

SURFACE PREPARATION :

The application surface should be cleaned thoroughly and should be free from particles and deposits, grease, or any other accumulations. Now prepare slurry and apply first coat on wall from bottom to top.

ADVANTAGES :

1) White smooth surface finish 2) No requirement of primer 3) Considerable reduction of paint consumption 4) Superior paint finish 5) Protection from flaking, dampening and peeling off

MIXING :

- ❖ Mix 1kg of Apricot Wall Putty in 350-400 ml of water in a clean bucket and not vice versa.
- ❖ Mix continuously by hand or using an electric stirrer to make a homogeneous lump-free paste.
- ❖ Leave the mix to slake for 10 minutes.
- ❖ Remix the paste for about 2 minutes before use.
- ❖ Use the mixture within 30 minutes of preparation.


APPLICATION :

- ❖ Dampen the surface to be plastered with clean water.
- ❖ Use a steel trowel/blade (Patti) to apply the mixture of about 0.5-1 mm thickness.
- ❖ Level and smoothen the surface and cure the first coat lightly once it dries.
- ❖ Apply the second coat of 0.5-1mm thickness once the first coat is fully dried and set.
- ❖ The thickness of each coat should not exceed 1mm and the total thickness of putty should not be more than 2mm.



TECHNICAL SPECIFICATIONS

Colour	Brilliant White
Mixing Ratio	With 30-35% Water
Dry Film Thickness	1-1.5 mm (standard)
Coverage	10-12 sq. ft per kg
Pack Size	5,10,20 & 40 Kg
Area of application	Plastered wall / ceiling surface
Finish	Absolute Matt/ egg shell finish
Tensile Strength	>1.0 Mpa at 28 days
Compressive	8.5 Mpa at 28 days
Pot life after mixing water	Maximum 2 hours

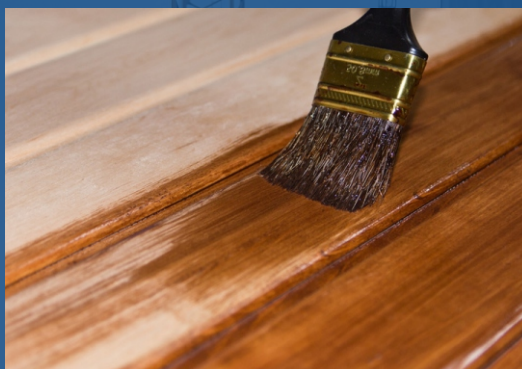

OUR OTHER PRODUCT RANGE PAINTS & WOOD COATINGS

PRICOT VASTU LAPE BASE COAT | SUPER SYNTHETIC ENAMEL | BLACK BOARD
RED OXIDE METAL PRIMER | WOOD CARE | CHAKRA WOOD PRIMER | ZINCROMITE YELLOW PRIMER
COPAL VARNISH | CHAKRA ALUMINUM PAINT | KPF PUTTY | ACRYLIC WASHABLE
CEMENT PRIMER WATER BASED | APP EXTERIOR EMULSIONS

PREMIUM SUPER SYNTHETIC ENAMEL PAINT | WOOD FINISH SANDING SEALER | STONE WOOD
CLEAR SYNTHETIC VARNISH | PU LUXURY WOOD FINISH | MELAMYNE PREMIUM WOOD FINISH
AVL - MELAMYNE THINNERS | NCMT1 - MULTI PURPOSE PREMIUM THINNERS
AVL - 6040 THINNERS FOR PU



MANUFACTURED BY:

ASHOKA
Coating Chemicals

ISO 9001 : 2015 / 14001:2015 & ISO 10002: 2018
CERTIFIED COMPANY

P.No. 359, Subash Nagar, IDA.,
Jeedimetla, Hyderabad - 055.
Tel: 040-2309 6102 / 92463 46102
Email: asvsp888@gmail.com

www.ashokacotingchemicals.com